







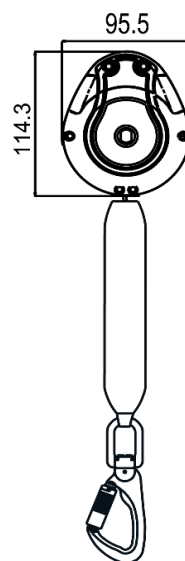






# Olympic-S2




<b>HS CODE</b>
84798997
<b>CARTON SIZE / PCS.</b>
60 x 40 x 24 cm / 6
AET N°10834-01/E01-01
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
<b>MODULE D F114/14003.02</b>
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16092-01/E01-01
<b>Satra Technology Centre, N°0321</b> Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
<b>MODULE D 11 IN14/14003</b>
<b>SGS United Kingdom Ltd., N°0120</b> Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom


<b>REF.</b>	<b>FA 20 503 02</b>
<b>LG.</b>  <b>KG</b>	2.0 m
<b>CE</b>	EN 360:2002
<b>MAT.</b> 	Polyamide 6 - 30% fiber glass  Aramid 21 mm
	<b>STEEL / ALU</b> FA 50 101 17 / FA 50 208 60
	x2
<b>R(kN)</b>	15 kN
	YES – 100 KG
<b>+</b> 	FACTOR 2 – 100 KG 1.25 KG

**LG.**  
  
**KG**

**Longueur** Poids maxi utilisateur  
**Length** Max. user weight  
**Longitud** Peso máximo del usuario  
**Lunghezza** Peso Max. dell'utente  
**Länge** Höchstgewicht des Benutzers

**MAT.**  



**Matière carter / sangle**  
Material of casing / webbing  
**Material cárter / correa**  
Material dei carter / Cinghia  
**Material Gehäuse / Gurt**



**Matière connecteur haut / connecteur bas**  
Material of top connector / bottom connector  
**Material conector alto / conector bajo**  
Materiale connettore alto / connettore basso  
**Material oberes / unteres Verbindungselement**



**Nombre d'émerillons**  
Number of swivels  
**Cantidad de eslabones giratorios**  
Numero di tornichetti  
**Anzahl der Wirbel**



**Homologué pour le travail à proximité d'arêtes vives**  
Approved for work near sharp edges  
**Homologado para trabajo cerca de aristas vivas**  
Omologato per lavoro in prossimità di spigoli vivi  
**Zugelassen für Arbeiten in der Nähe scharfer Kanten**